






### BXIUV - Standard End Ferrule, Stainless Steel Sheathing, Rated for -40°F to 347°F

| Model      | Part #       | A                 | B                 | C                 | D                  | E                 | F                 | G                | L                                  |
|------------|--------------|-------------------|-------------------|-------------------|--------------------|-------------------|-------------------|------------------|------------------------------------|
| BXIUUV6120 | 002014006120 | .062"<br>(1.59mm) | .187"<br>(4.75mm) | .286"<br>(7.23mm) | .203"<br>(5.15 mm) | .286"<br>(7.23mm) | .187"<br>(4.75mm) | .50"<br>(12.7mm) | 24" (609.60 mm)<br>36" (914.40 mm) |
| BXIUUV824  | 002014008024 | .125"<br>(3.18mm) | .187"<br>(4.75mm) | .375"<br>(9.52mm) | .345"<br>(8.76mm)  | .375"<br>(9.52mm) | .187"<br>(4.75mm) | .50"<br>(12.7mm) | 24" (609.60 mm)                    |
| BXIUUV836  | 002014008036 |                   |                   |                   |                    |                   |                   |                  | 36" (914.40 mm)                    |
| BXIUUV860  | 002014008060 |                   |                   |                   |                    |                   |                   |                  | 60" (1524.0 mm)                    |
| BXIUUV884  | 002014008084 |                   |                   |                   |                    |                   |                   |                  | 84" (2133.6 mm)                    |
| BXIUUV424  | 002014004036 | .250"<br>(6.35mm) | .312"<br>(7.92mm) | .615"<br>(15.6mm) | .560"<br>(14.22mm) | .615"<br>(15.6mm) | .312"<br>(7.92mm) | .50"<br>(12.7mm) | 24" (609.60 mm)                    |
| BXIUUV436  | 002014004036 |                   |                   |                   |                    |                   |                   |                  | 36" (914.40 mm)                    |
| BXIUUV448  | 002014004048 |                   |                   |                   |                    |                   |                   |                  | 48" (1219.2 mm)                    |
| BXIUUV460  | 002014004060 |                   |                   |                   |                    |                   |                   |                  | 60" (1524.0 mm)                    |

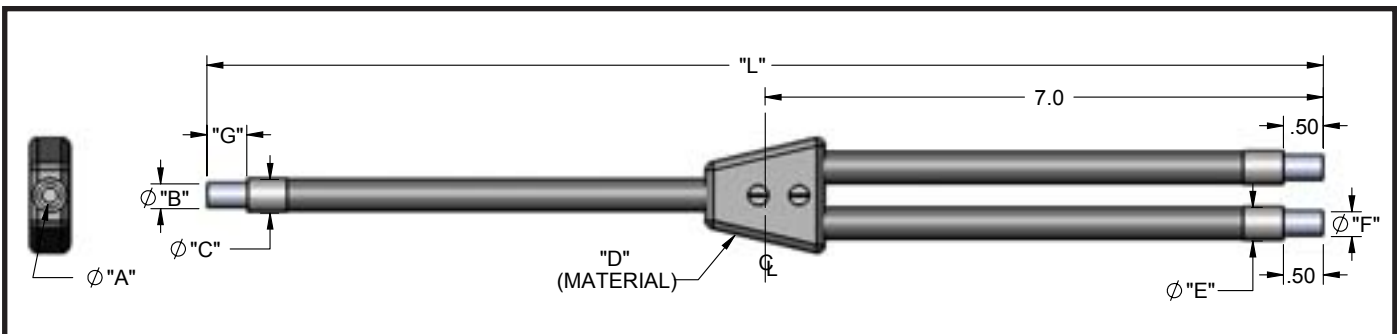

### EIUUV - Standard End Ferrule, PVC Monocoil Sheathing, Rated for -40°F to 221°F

| Model    | Part #       | A                 | B                 | C                 | D               | E                 | F                 | G                | L   |
|----------|--------------|-------------------|-------------------|-------------------|-----------------|-------------------|-------------------|------------------|---|
| EIUUV624 | 002022006024 | .062"<br>(1.59mm) | .187"<br>(4.75mm) | .253"<br>(6.42mm) | PVC Heat Shrink | .205"<br>(5.2mm)  | .187"<br>(4.75mm) | .50"<br>(12.7mm) | 24" (609.60 mm)<br>36" (914.40 mm)                    |
| EIUUV636 | 002022006036 | .125"<br>(3.18mm) | .187"<br>(4.75mm) | .312"<br>(7.92mm) | PVC Heat Shrink | .253"<br>(6.42mm) | .187"<br>(4.75mm) | .50"<br>(12.7mm) | 24" (609.60 mm)                                       |
| EIUUV824 | 002022008024 |                   |                   |                   |                 |                   |                   |                  | 36" (914.40 mm)                                       |
| EIUUV424 | 002022004024 |                   |                   |                   |                 |                   |                   |                  | 48" (1219.2 mm)                                       |
| EIUUV436 | 002022004036 |                   |                   |                   |                 |                   |                   |                  | 60" (1524.0 mm)                                       |
| EIUUV448 | 002022004048 | .250"<br>(6.35mm) | .312"<br>(7.92mm) | .468"<br>(11.9mm) | PVC Heat Shrink | .422"<br>(10.7mm) | .312"<br>(7.92mm) | .50"<br>(12.7mm) | 24" (609.60 mm)<br>36" (914.40 mm)<br>48" (1219.2 mm) |

#### Vision Light Tech B.V.

Protonenlaan 22, 5405 NE UDEN, P.O. Box 345, 5400 AH UDEN, The Netherlands

Phone: +31 (0)413 26 00 67, Fax +31 (0)413 26 09 38, E-mail: inquiry@vlt.nl, Website: www.vlt.nl

Trade register No. 17150044, VAT No. NL8112.30.946.B01