




MetaBright™ OmniLight

Model#: MB-OBL14X14

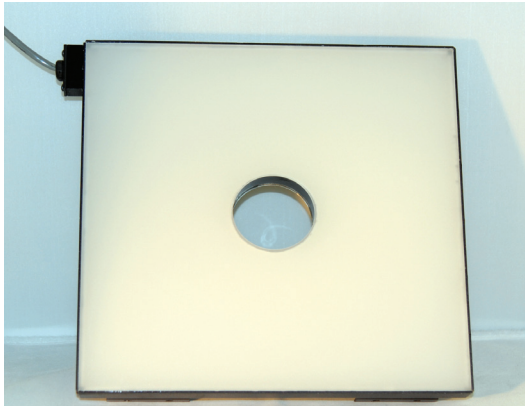

- Lightweight alloy housing comes with welded brackets for secure and easy mounting
- Larger panels for even lighting
- Thin profile for easier installation
- Diffused, even illumination of standard dome lights

Part #	Color	Power Supply	Specifications:	
MB-OBL14X14-W-24	White 6000 K	24 volt power supply available upon request.	Current Consumption	3.85A
MB-OBL14X14-R-24	Red 630nm		Finish	Black Anodized
MB-OBL14X14-B-24	Blue 455nm		Intensity Uniformity	+/-5%
MB-OBL14X14-G-24	Green 530nm		Weight	8lbs / 3.6kg
MB-OBL14X14-IRN-24	Infrared 850nm		Operating Temperature	120° F Max
MB-OBL14X14-UVL-24	UltraViolet 395nm		Compliance	CE/RoHS
			Lifetime Hours	75,000 Hours

10 ft. flying leads come standard on all products.
Light features built-in constant current driver.
No expensive controller required.

Contact Us:

Contact your Metaphase Technologies Representative for options including: Diffuser Choice, Polarizer & Light Control Film, Specific Intensity & Uniformity, & Wavelength.

ORDERING INFORMATION:

• M B - O B L 1 4 X 1 4 - - 2 4 -

W	White 5500k	*BLANK	10 ft. Flying Leads
R	Red 630nm	T	M12 Quick Disconnect
G	Green 530nm	ILD	In Line Dimmer
B	Blue 455 nm	ILS	In Line Strobe (customer provide trigger info)
IRL	Infrared 880nm		
UVL	(long) 395nm		
UVS	(short) 365nm		

MetaBright™ OmniLight


Model#: MB-OBL14X14

Wiring Diagram

Flying Leads	Function
RED	+24VDC
BLACK	Ground
WHITE	+24VDC
GREEN	Ground

M12 Connector

PIN #	Function
1	+24VDC
2	0-10VDC Intensity Control
3	Ground
4	Signal Ground

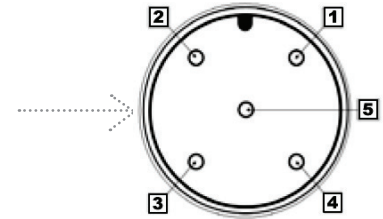

24 AWG 4 WIRES CABLE X 1

When not using intensity control, connect 0-10V control line to +24 (Max Intensity Control = 25V) and intensity control ground to ground

Drawing/Diagram

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
D		REVISED AND REDRAWN. KW	4/11/2011	
E		ADDED TABLE. KW	12/22/2011	

